



Hospitality Solutions

**Armstrong**Flooring™

---

## Contents

- 04** Rest & Refuge™
  - 12** Biome™
  - 14** Terra™
  - 18** Coalesce™
  - 22** Exchange™
  - 26** Parallel® USA
  - 30** Rigid Core Vantage™
  - 34** Rigid Core Essentials™
  - 40** Product Information
- 

Durable for Business. Beautiful for Guests.



## Warm & Welcoming

---

Rest & Refuge was engineered to offer sound blocking benefits. Its ultra-dense core with an attached pad – for single product acoustic performance – helps to block airborne and structure-borne sound. The structure also reduces subfloor prep, hides minor subfloor imperfections, and does not need to be acclimated in most spaces for ease of installation.







# Design Without Limits

---

Inspire and invigorate with four new Luxury Flooring collections. Each collection is curated with purposeful pattern and color for impactful, cohesive design and features a 2.5 mm structure with patented Diamond 10® Technology. The combination of Diamond 10 Technology and the unique LVT structure results in superior performance and durability compared to competitive products.

COFFEE















# The Right Combination of Performance, Design and Price

---

Manufactured in the USA, Parallel USA Luxury Flooring offers a balance of performance, design and price. All designs are available in two structures and feature Urethane Plus coating for enhanced resistance to scratches, stains, and scuffs compared to standard urethane coatings.





## The Foundation for Dramatic Spaces

---

Rigid Core Vantage offers large format planks in realistic designs. It's rigid core structure provides dent resistance and the attached cork backing helps span minor subfloor imperfections that may telegraph through thinner flexible LVT.







## Peaceful Quiet

---


Provide an enhanced peaceful quiet for your guests with Rigid Core Essentials. Inspired by natural wood tones, Essentials offers the aesthetic you want with the function of an ultra-dense rigid core that dampens airborne sound. Install in a snap without the need for adhesive or underlayment and enjoy low-maintenance benefits with a wear layer that resists scratches, scuffs, and stains.



# Rest & Refuge™

## Product Information

- Construction** - Rigid Core
- International Specifications** - ASTM F3261, Class I, Type B, Grade 1, Backing Class B
- Overall Thickness** - 6.5 mm / 0.25 in.
- Wear Layer Thickness** - 20 mil / 0.5 mm
- Size** - 8.85 in. x 60 in. (225 mm x 1524 mm)
- Factory Finish** - Diamond 10® Technology
- Installation** - Floating
- Maintenance Options** - No Polish – No Buff, Spray Buff, Polish

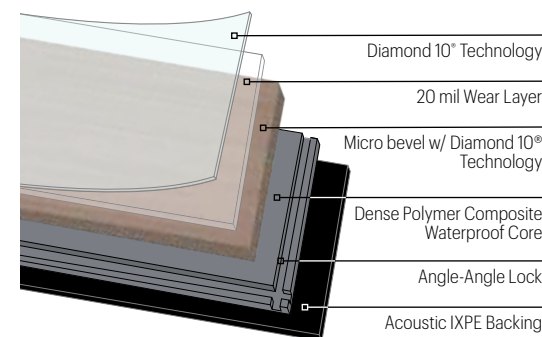

Diamond 10 Technology




Visit [ArmstrongFlooring.com](http://ArmstrongFlooring.com) for complete Product, Technical, Adhesives, Installation and Maintenance recommendations.

# Biome™

## Product Information

- Construction** - Solid Vinyl Tile (a.k.a. Luxury Vinyl Tile - LVT)
- International Specifications** - ASTM F1700, Class III, Type B embossed surface
- Overall Thickness** - 2.5 mm / 0.100 in.
- Wear Layer Thickness** - 0.020 in. / 0.5 mm
- Size** - 6 in. x 48 in. (152 mm x 1219 mm)  
9 in. x 48 in. (228 mm x 1219 mm)
- Factory Finish** - Diamond 10® Technology
- Installation** - Adhesives: S-315 Roll Strong™, S-980, S-1000, S-240 Epoxy
- Maintenance Options** - No Polish – No Buff, Polish Optional

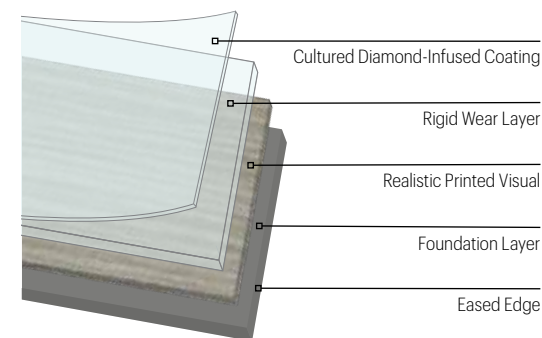

Made in the USA  
\*with global and domestic content.

Diamond 10 Technology





Biome™

# Terra™

## Product Information

- Construction** - Solid Vinyl Tile (a.k.a. Luxury Vinyl Tile - LVT)
- International Specifications** - ASTM F1700, Class III, Type B embossed surface
- Overall Thickness** - 2.5 mm / 0.100 in.
- Wear Layer Thickness** - 0.020 in. / 0.5 mm
- Size** - 18 in. x 18 in. (152 mm x 1219 mm)  
18 in. x 36 in. (228 mm x 1219 mm)
- Factory Finish** - Diamond 10® Technology
- Installation** - Adhesives: S-315 Roll Strong™, S-980, S-1000, S-240 Epoxy
- Maintenance Options** - No Polish – No Buff, Polish Optional

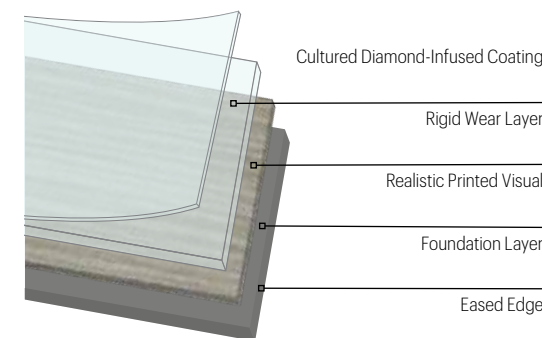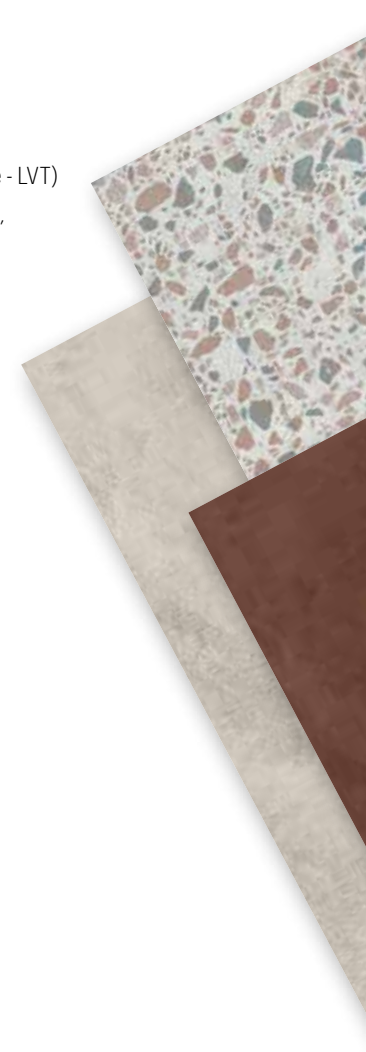

Made in the USA  
\*with global and domestic content.

Diamond 10 Technology





Terra™

# Coalesce™

## Product Information

- Construction** - Solid Vinyl Tile (a.k.a. Luxury Vinyl Tile - LVT)
- International Specifications** - ASTM F1700, Class III, Type B embossed surface
- Overall Thickness** - 2.5 mm / 0.100 in.
- Wear Layer Thickness** - 0.020 in. / 0.5 mm
- Size** - 6 in. x 36 in. (152 mm x 914 mm)  
18 in. x 18 in. (457 mm x 457 mm)  
18 in. x 36 in. (457 mm x 914 mm)
- Factory Finish** - Diamond 10® Technology
- Installation** - Adhesives: S-315 Roll Strong™, S-980, S-1000, S-240 Epoxy
- Maintenance Options** - No Polish – No Buff, Polish Optional

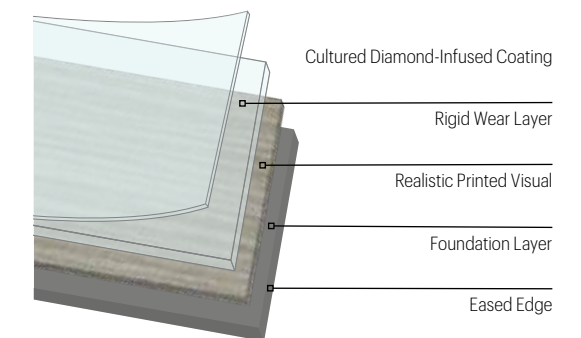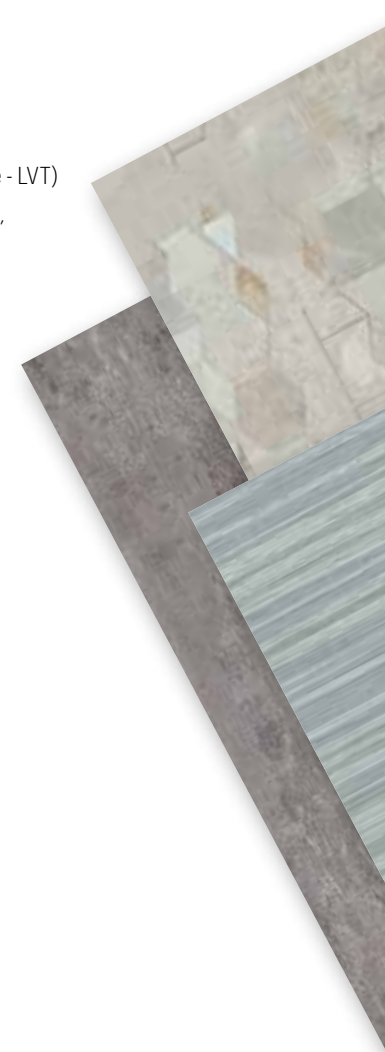

Made in the USA  
\*with global and domestic content.

Diamond 10 Technology



Coalesce™

## Exchange™

### Product Information

**Construction** - Solid Vinyl Tile (a.k.a. Luxury Vinyl Tile - LVT)

**International Specifications** - ASTM F1700, Class III, Type B embossed surface

**Overall Thickness** - 2.5 mm / 0.100 in.


**Wear Layer Thickness** - 0.020 in. / 0.5 mm

**Size** - 6 in. x 36 in. (152.4 mm x 914.4 mm)

**Factory Finish** - Diamond 10® Technology

**Installation** - Adhesives: S-315 Roll Strong™, S-980, S-1000, S-240 Epoxy

**Maintenance Options** - No Polish – No Buff, Polish Optional

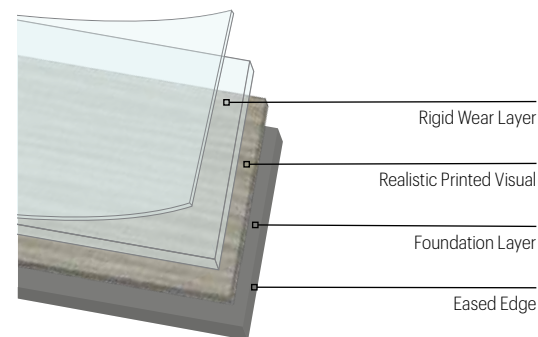

**Made in the USA**  
\*with global and domestic content.

**Diamond 10 Technology**



Exchange™

## Parallel® USA 20 | Parallel® USA 12

### Product Information

**Construction** - Solid Vinyl Tile (Luxury Vinyl Tile / LVT)

**International Specifications** - ASTM F1700, Class III, Type B embossed surface

**Overall Thickness** - Parallel USA 20: 2.5 mm / 0.100 in.

Parallel USA 12: 2.0 mm / 0.080 in.

**Wear Layer Thickness** - Parallel USA 20: 0.5 mm / 0.020 in.

Parallel USA 12: 0.3 mm / 0.012 in.

**Size - Parallel® USA 20**

6 in. x 48 in. (152.4 mm x 1219.2 mm)

18 in. x 18 in. (457.2 mm x 457.2 mm)

**Parallel® USA 12**


6 in. x 48 in. (152.4 mm x 1219.2 mm)

18 in. x 18 in. (457.2 mm x 457.2 mm)

**Factory Finish** - Urethane Plus

**Installation** - Full Spread Adhesives: S-315 Roll Strong™, S-980, S-1000, S-240 Epoxy

**Maintenance Options** - No Polish – No Buff, Polish Optional

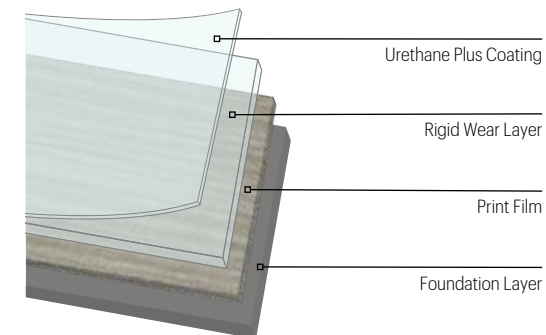

**Made in the USA**  
\*with global and domestic content.



Parallel® USA 20



Parallel® USA 12

## Rigid Core Vantage™

### Product Information

**Construction** - Rigid Core

**International Specifications** - ASTM F3261, Class I, Type B, Grade 1, Backing Class B

**Overall Thickness** - 6 mm / 0.236 in.

**Wear Layer Thickness** - 20 mil / 0.5 mm


**Size** - 7 in. x 60 in. (177.8 mm x 1,524 mm)

9 in. x 60 in. (225 mm x 1,524 mm)

**Factory Finish** - Urethane

**Installation** - Drop-lock or S-288 full spread

**Maintenance Options** - No Polish – No Buff

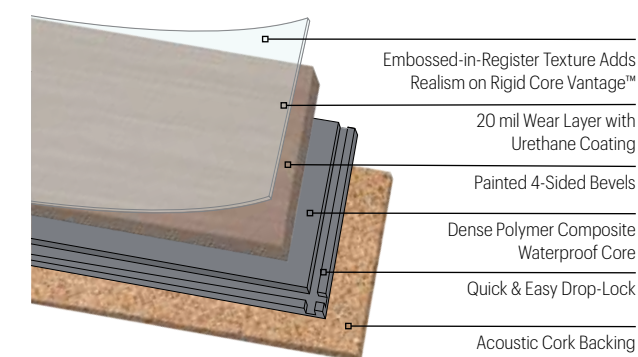

**Visit ArmstrongFlooring.com**  
for complete Product, Technical, Adhesives, Installation and Maintenance recommendations.

## Rigid Core Essentials™

### Product Information

**Construction** - Rigid Core

**International Specifications** - ASTM F3261, Class I, Type B, Grade 2, Backing Class B

**Overall Thickness** - 5 mm / 0.2 in.


**Wear Layer Thickness** - 12 mil / 0.3 mm

**Size** - 6 in. x 48 in. (144 mm x 1213 mm)

**Factory Finish** - UV-cured Polurethane

**Installation** - Floating or Full Spread Adhesive: S-995

**Maintenance Options** - No Polish – No Buff, Polish

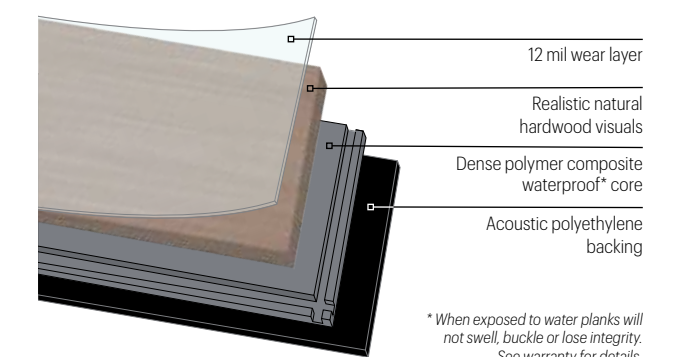

\*When exposed to water planks will not swell, buckle or lose integrity. See warranty for details.



**Visit ArmstrongFlooring.com**  
for complete Product, Technical, Adhesives, Installation and Maintenance recommendations.

**Armstrong**Flooring™

Walk On. Walk Strong.™

F-10735-322 | Printed in USA. | Armstrong and the Armstrong logo are under license from AWI Licensing LLC.  
All other trademarks are owned by AFI Licensing LLC. | © 2022 AFI Licensing LLC.